

FIG.1
PRIOR ART

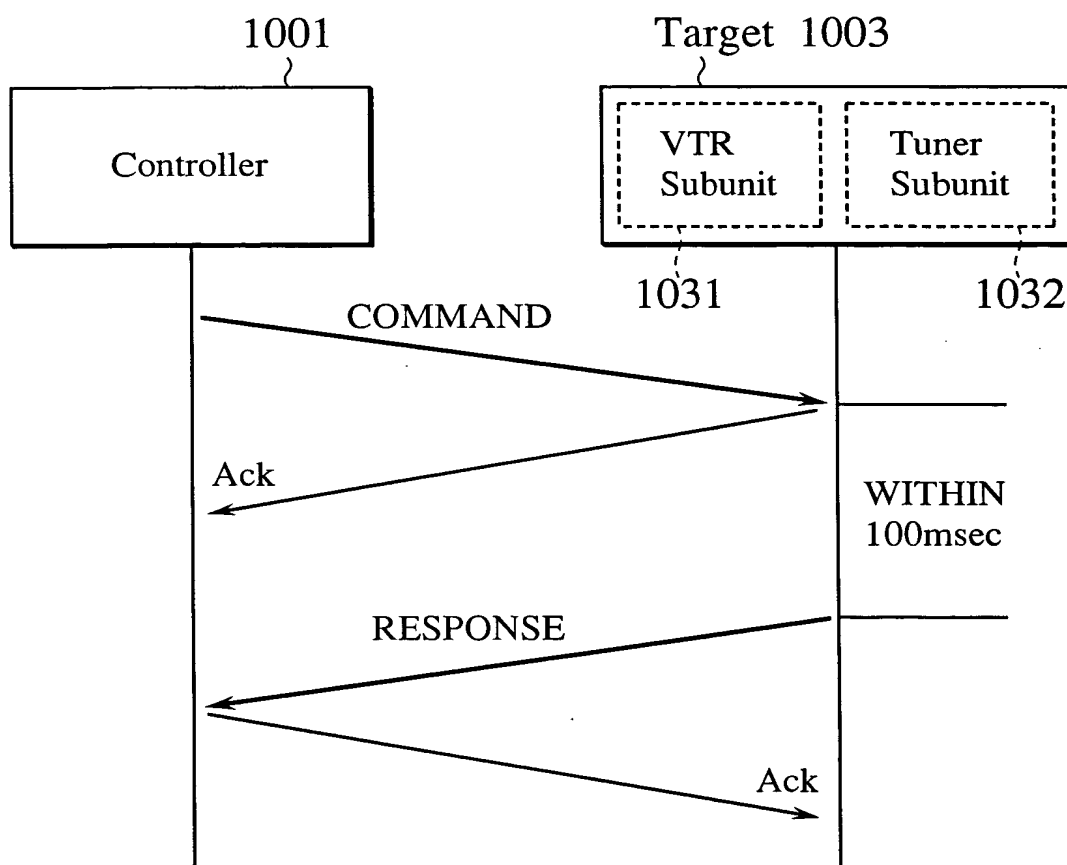


FIG.2

PRIOR ART

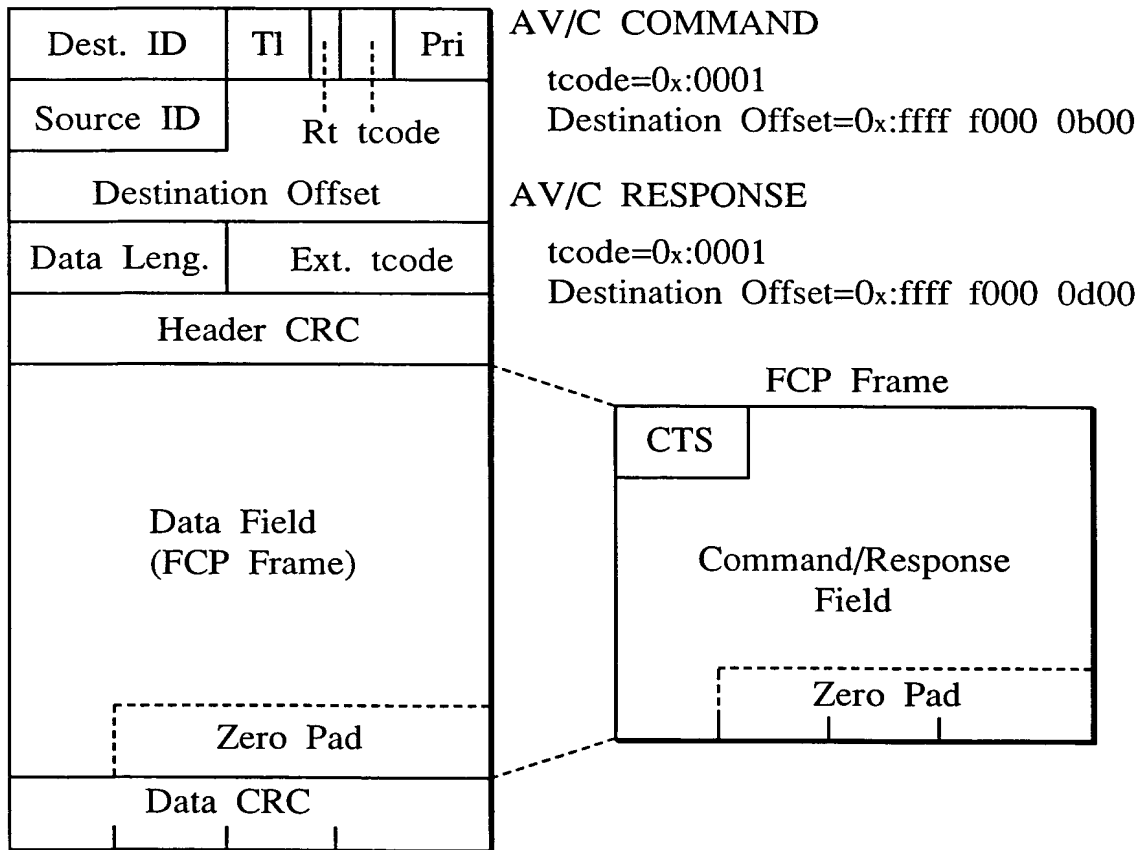


FIG. 3

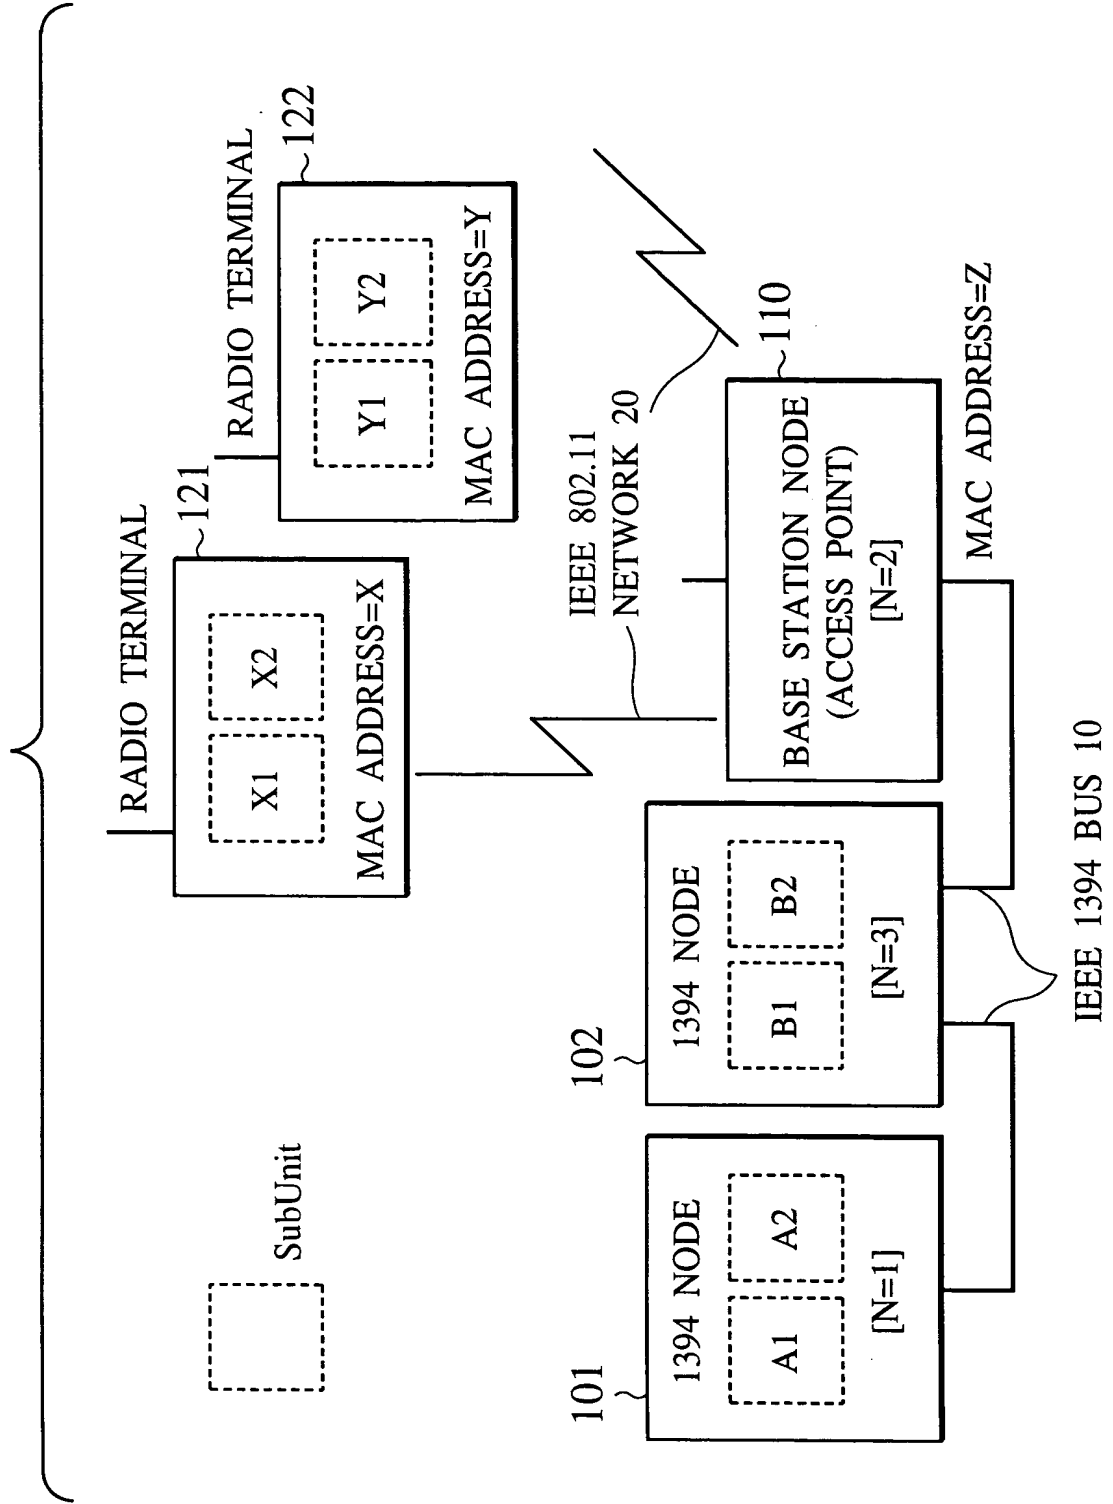


FIG.4

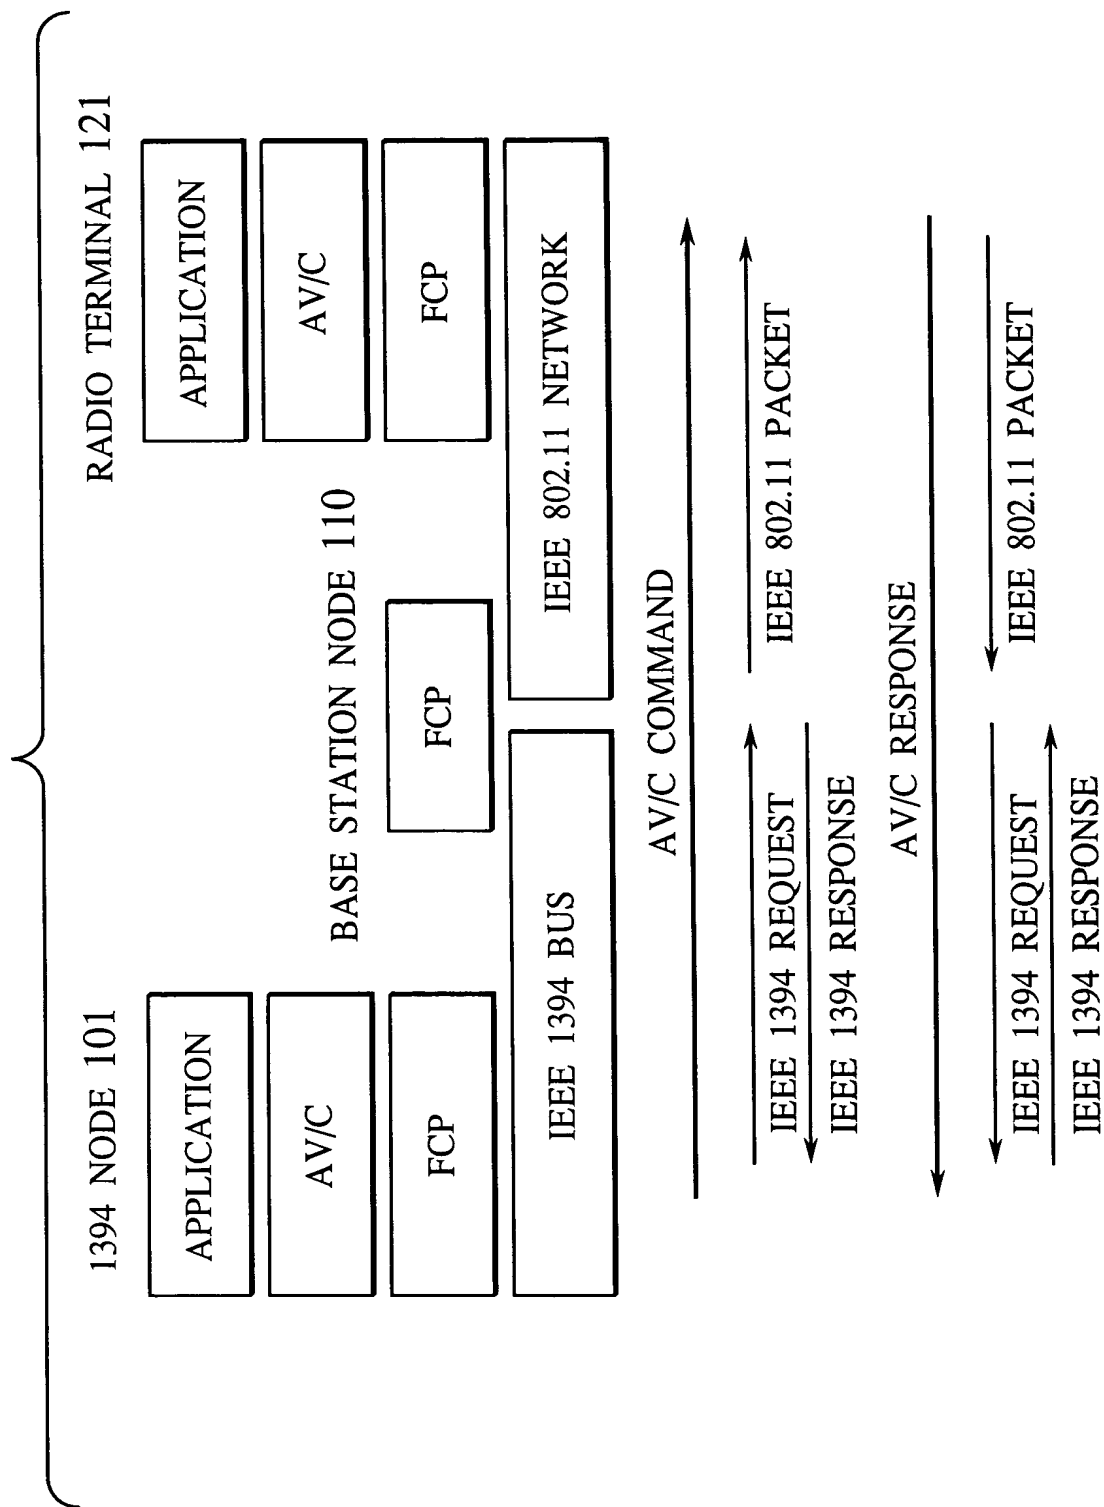


FIG.5

0000		ctype	X	Y	opcode	operand [0]
operand [1]		operand [2]		operand [3]		operand [4]
operand [n]		Zero Pad				

Command Frame

ctype:command type
X:Subunit_type
Y:Subunit_ID
opcode:operand code

FIG.6

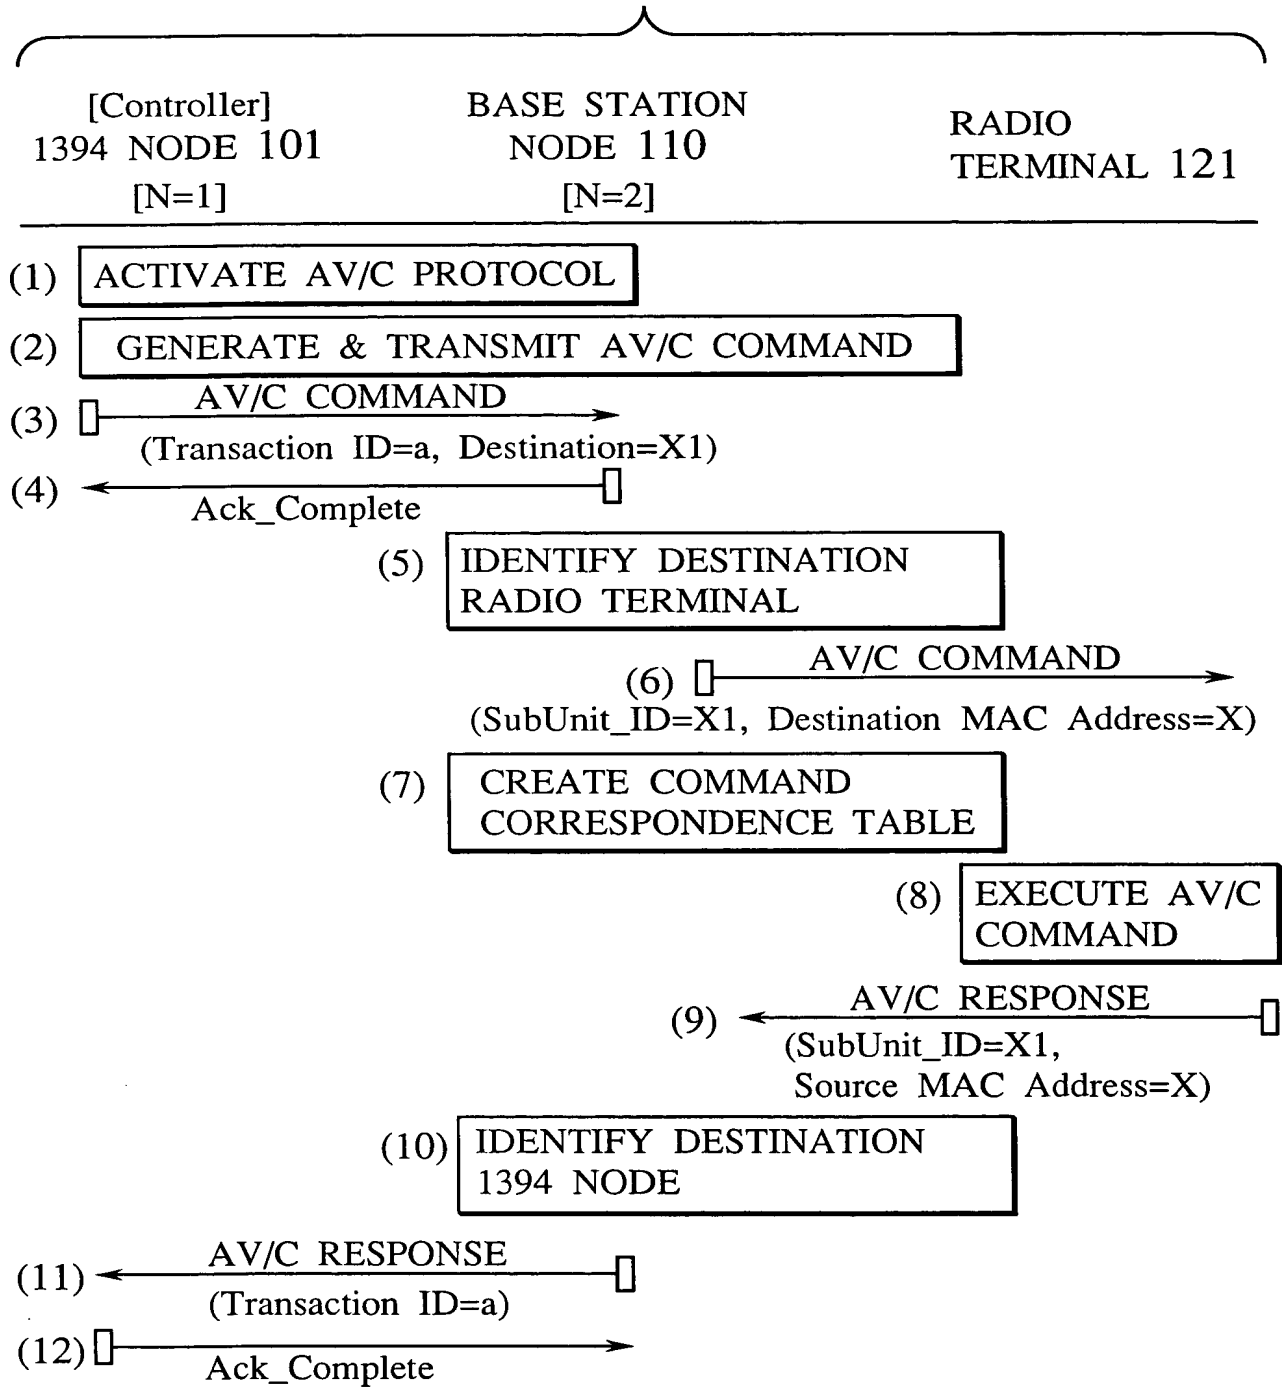


FIG.7

AV/C COMMAND No.	IEEE 1394 SIDE	IEEE 802.11 SIDE
COMMAND #1	Node_ID=1, Tran._ID=a	Ctype=control SubUnit_Type=VTR SubUnit_ID=X1, MAC Address=X
COMMAND #2	Node_ID=1, Tran._ID=b	Ctype=status SubUnit_Type=Tuner SubUnit_ID=X2, MAC Address=X
COMMAND #3	Node_ID=3, Tran._ID=c	Ctype=control SubUnit_Type=Disk SubUnit_ID=Y1, MAC Address=Y
⋮	⋮	⋮

FIG.8

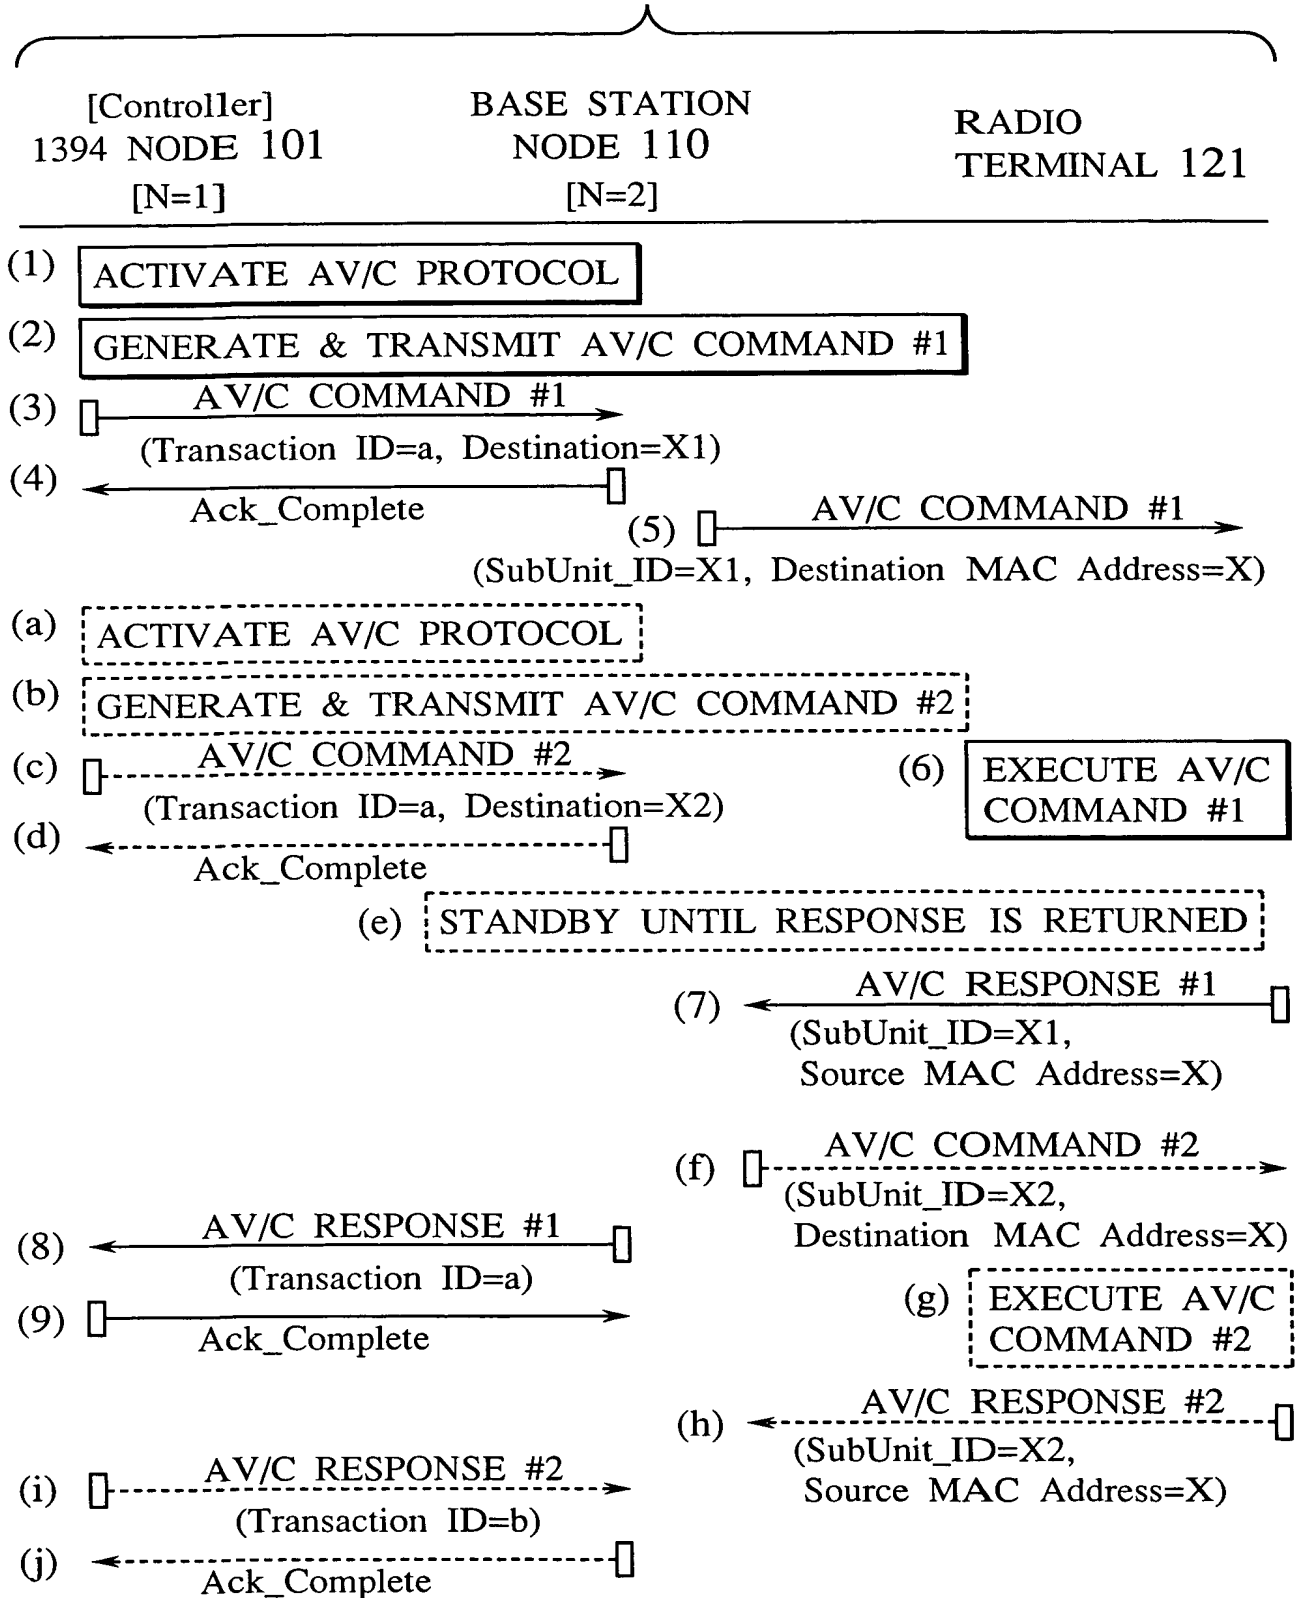


FIG.9

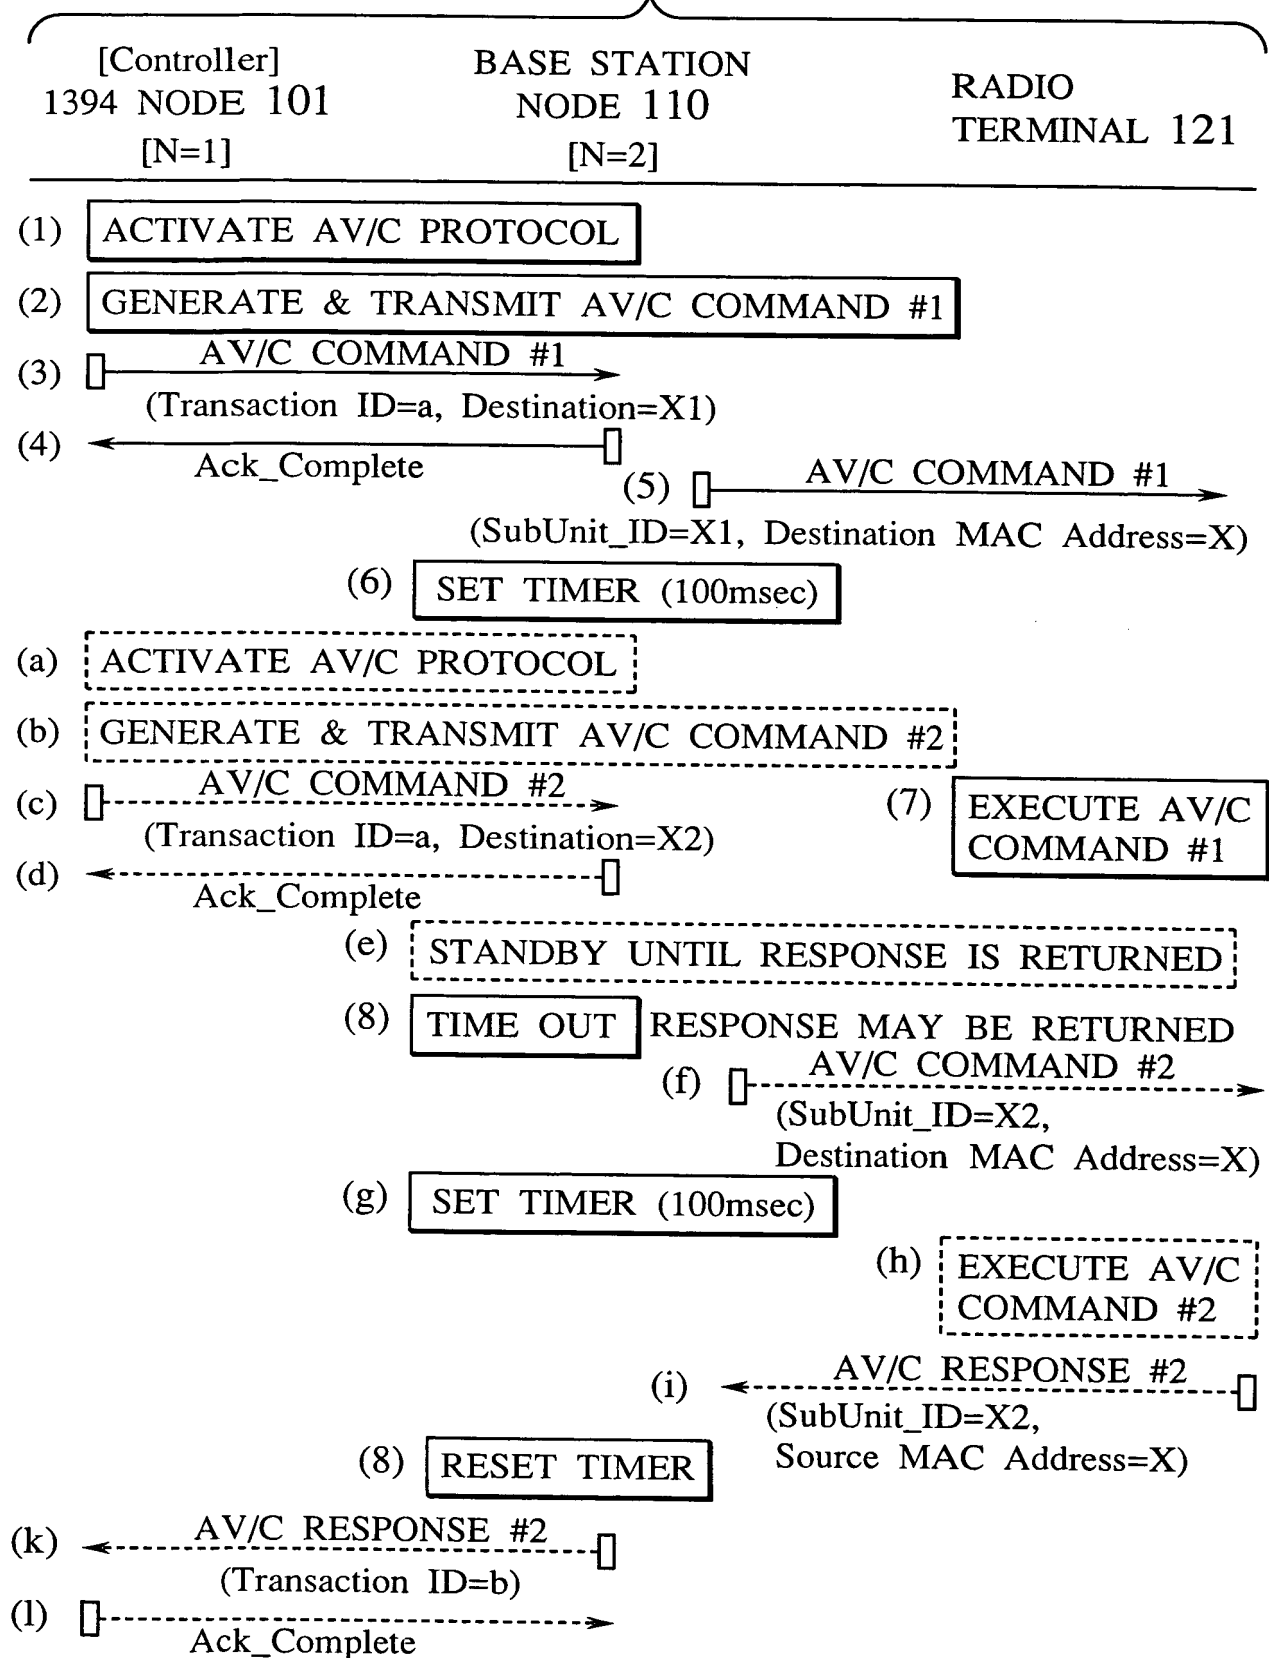


FIG.10

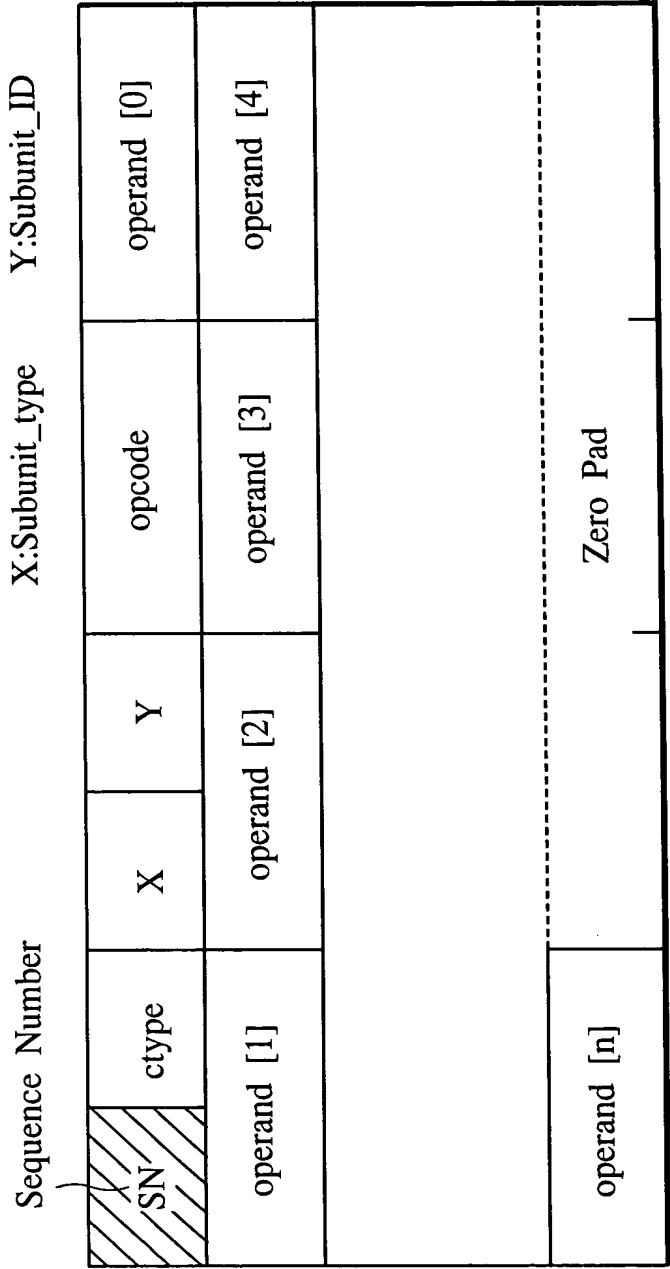


FIG.11

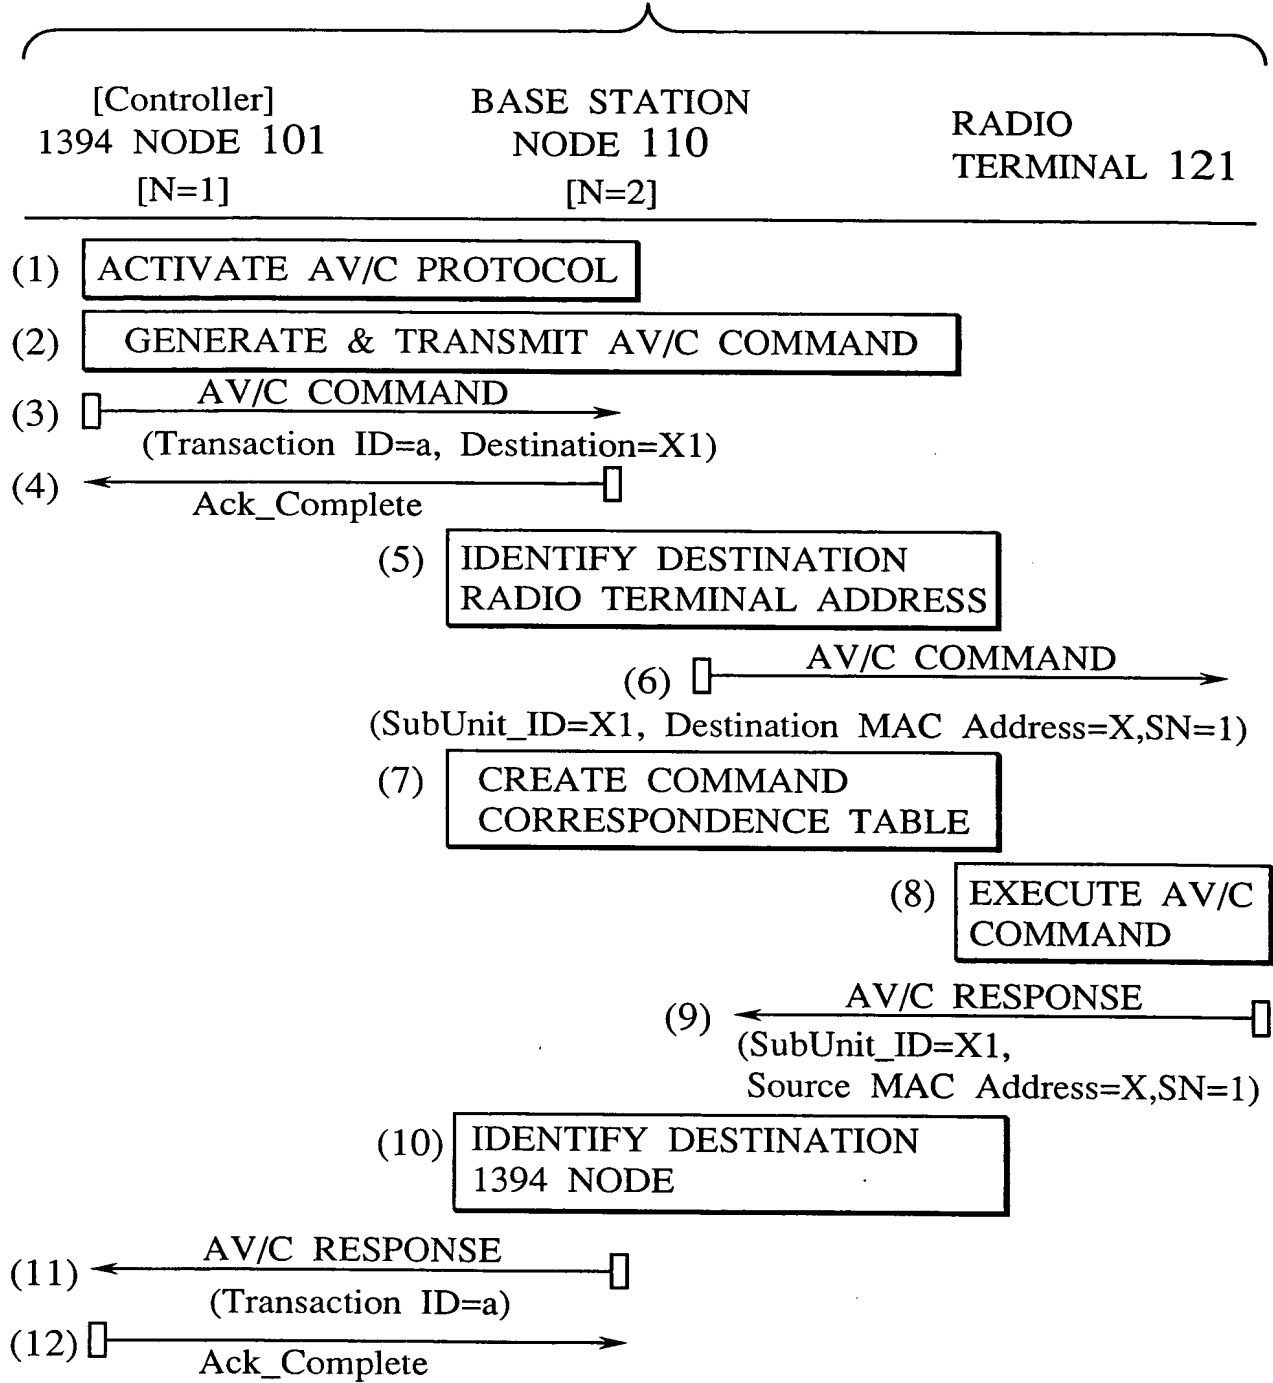


FIG.12

